

# Single Fire Coil C90i-pro

www.bosch-motorsport.com



**BOSCH**  
Invented for life



- ▶ Max. 40 kV
- ▶ Max. 90 mJ
- ▶ Max. 5.0 kV/μs
- ▶ Especially developed for Turbo-GDI engines
- ▶ Max. 15,000 1/min

This single fire coil was developed for the use e.g. in GDI (turbocharged) high performance engines. It is designed for direct cylinder head mounting. The C90i-pro provides the possibility of ionic current measurement. The design of the upper part (wire side) and the lower part (spark plug side) can be designed per customer specification.

The main benefits of this high performance coil are its high energy capability and a very good provided high voltage.

## Application

Spark energy	≤ 90 mJ
Primary current	≤ 16 A
Operating temperature range outer core	0 to 160°C
Storage temperature range	-40 to 100°C
Max. vibration	≤ 480 m/s <sup>2</sup> at 50 to 2,000 Hz

## Technical Specifications

### Mechanical Data

Length	168 mm
Weight w/o wire	< 230 g
Mounting	screw fastening

### Electrical Data

Primary resistance	185 mΩ
Secondary resistance	incapable of measurement
High voltage rise time	≤ 5.0 kV/μs
Max. high voltage at 1 MΩ    10 pF	≤ 40 kV
Spark current	≤ 160 mA
Spark duration at 1 kV    1 MΩ	≤ 1.1 ms
Noise suppression	inductive
Suppression diode / EFU	internal

### Characteristic

Measured with power stage	IGBT IRG4BC40S (U <sub>ce</sub> =600 V)
---------------------------	---

### Connectors and Wires

Connector	On request
Mating connector	On request
Pin 1	U <sub>batt</sub> red
Pin 2	ECU collector blue
Pin 3	Engine GND black
Pin 4	Ionic current signal white

Wire length	75 cm
Wire size	AWG 20/22
For spark plugs	ceramic diameter d = 8 mm


Various motorsport and automotive connectors are available on request.

Please specify the required wire length and the length of the spark plug connector with your order

**Characteristic dwell times [ms]**

I primary							
U <sub>batt</sub>	10A	12A	15A	16A	17A	20A	
6V	3.2	4.5	7.6	9.8			
8V	1.88	2.49	3.47	3.79	4.10		
10V	1.35	1.76	2.34	2.51	2.67	3.05	
12V	1.06	1.35	1.77	1.89	2.00	2.24	
14V	0.87	1.11	1.43	1.52	1.60	1.79	
16V	0.74	0.93	1.20	1.28	1.34	1.49	
16.5V	0.71	0.90	1.15	1.23	1.29	1.43	
18V	0.64	0.81	1.03	1.10	1.15	1.27	


Measured values are without loom resistance. Loom resistance must be less than the primary resistance. The needed dwell time is to be verified through current measurement

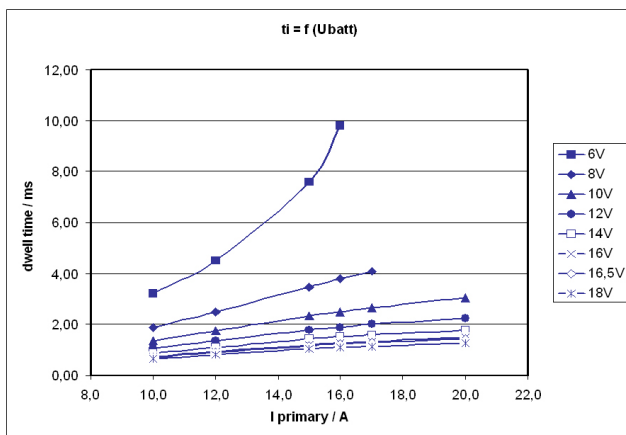

Dwell time

**Spark energy and provided high voltage**

I prim.	Spark energy	-duration	-current	Hi voltage
10 A	41.4 mJ	0.74 ms	100 mA	31.6 kV
12 A	59.5 mJ	0.882 ms	122 mA	37.4 kV
15 A	84.4 mJ	1.034 ms	148 mA	45.7 kV
16 A	92.6 mJ	1.07 ms	158 mA	46 kV
17 A	100 mJ	1.09 ms	165 mA	46 kV
20 A	115 mJ	1.16 ms	190 mA	46 kV

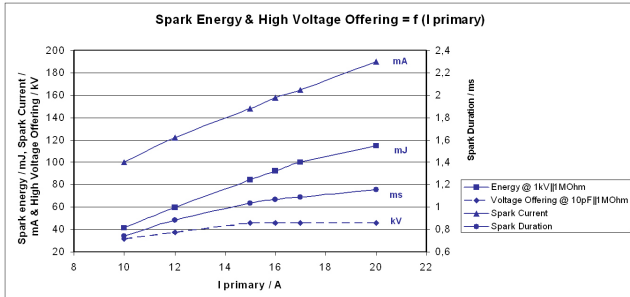

Spark energy

**Installation Notes**

During mounting of the spark plug please pay attention that full clamping and proper contacts are made to ensure safe connection between coil and spark plug.

This coil is only for use with engine control units having an integrated ignition power stage, e.g. IGBT IRG4BC40S or BIP.

For technical reasons the values of the coils may vary.

Please regard the specified limit values (see “Electrical Data”).

Usage above I<sub>prim</sub> = 16 A may reduce the lifetime.

Please find further application hints in the offer drawing at our homepage.


In case of ignition-caused malfunctions, please use screened sensor wires.

**Ordering Information**

**Single Fire Coil C90i-pro**

Order number **0 221 B00 256-01**

Dimensions

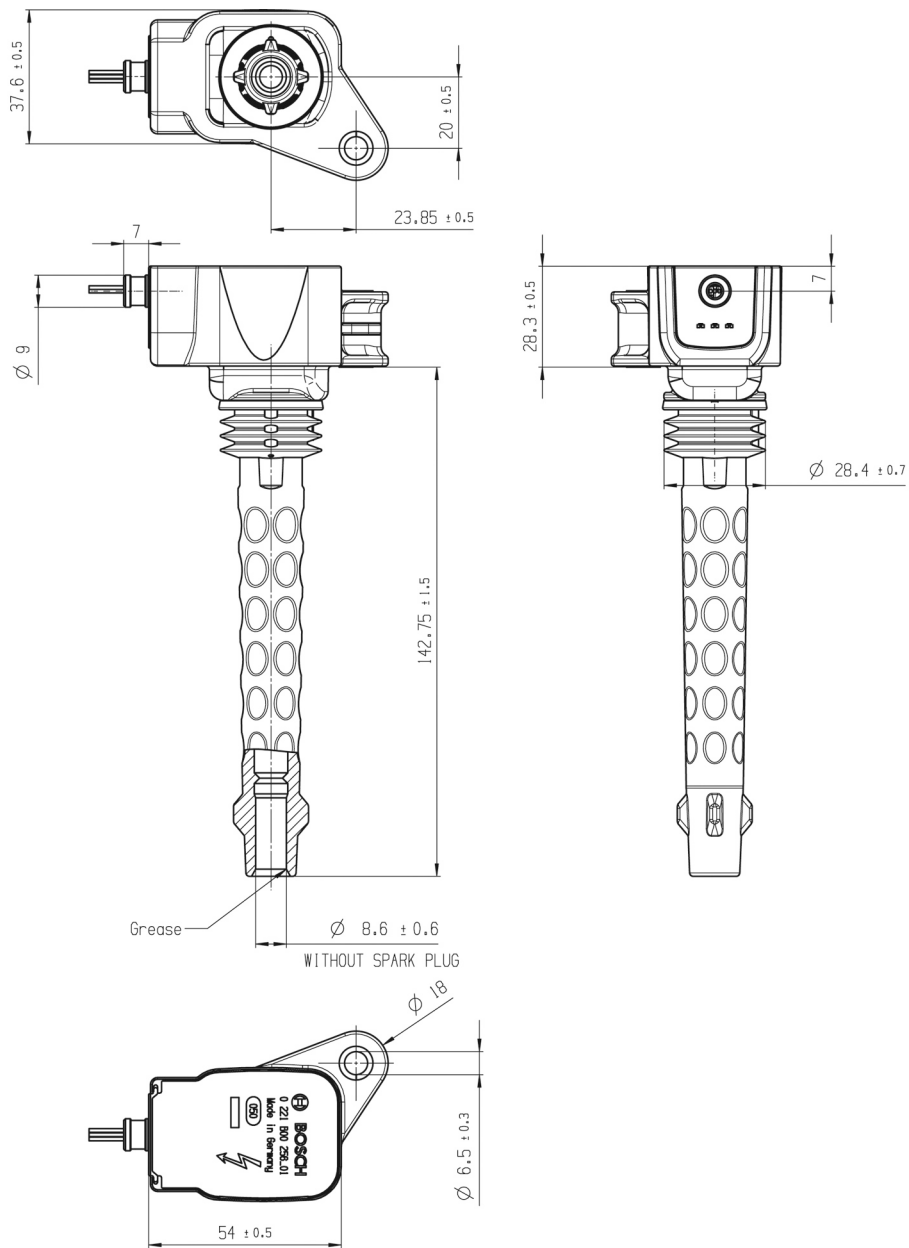

Represented by:

**Europe:**  
 Bosch Engineering GmbH  
 Motorsport  
 Robert-Bosch-Allee 1  
 74232 Abstatt  
 Germany  
 Tel.: +49 7062 911 79101  
 Fax: +49 7062 911 79104  
 motorsport@bosch.com  
 www.bosch-motorsport.de

**North and South America:**  
 Bosch Engineering North America  
 Motorsports  
 38000 Hills Tech Drive  
 Farmington Hills, MI 48331-3417  
 United States of America  
 Tel.: +1 248 876 2977  
 Fax: +1 248 876 7373  
 motorsport@bosch.com  
 www.bosch-motorsport.com

**Asia-Pacific:**  
 Bosch Engineering Japan K.K.  
 Motor Sport Department  
 3-33-8 Tsuruya-cho, Kanagawa-ku, Yokohama-shi  
 Kanagawa 221-0835  
 Japan  
 Tel.: +81 45 410 1650  
 Fax: +81 45 410 1651  
 motorsport@bosch.com  
 www.bosch-motorsport.com