

# Speed Sensor Hall-Effect Mini-HA-P sealed



- ▶ Max. frequency:  $\leq 10$  kHz
- ▶ Air gap: 0.2 to 1.5 mm
- ▶ Bore diameter: 16 mm
- ▶ Max. vibration:  $1,200 \text{ m/s}^2$  at 10 Hz to 2 kHz
- ▶ Weight w/o wire: 20 g

This sensor is designed for incremental measurement of rotational speed (e.g. camshaft, crankshaft and wheelspeed).

Due to the rotation of a ferromagnetic target wheel in front of the Mini-HA-P sealed, the magnetic field is modulated at the place of the Hall probe. A Hall-effect sensor element with integrated signal conditioning circuit detects this change and generates a digital output signal.

The main feature and benefit of this sensor is the combination of a high quality production part and a robust design with a very small housing.

## Application

Application	Speed
Max. frequency	$\leq 10$ kHz
Target wheel air gap	0.2 to 1.5 mm
Temperature range	-40 to 150°C
Output circuit	Open collector for 1 kOhm
Output type	Active low
External magnetic fields	$\leq 0.3$ mT
Max. vibration	$1,200 \text{ m/s}^2$ at 10 Hz to 2 kHz

## Technical Specifications

### Variations

Connector	ASL606-05PC-HE
Mating connector	ASL006-05SC-HE F02U.000.228-01
Pin 1	$U_s$
Pin 2	Gnd
Pin 3	Sig

Pin 4	Nc
Pin 5	Nc
Wire length L	10 - 27 cm
Without connector	
Red	$U_s$
Green	Sig
Black	Gnd
Wire length L	27 cm

### Mechanical Data

Weight w/o wire	19.2 g
Mounting	With screw 1 x M6
Bore diameter	16 mm
Installation depth L2	12 mm
Tightening torque	8 Nm

### Electrical Data

Power supply	5 to 18 V
Current $I_S$	10 mA

### Characteristic

Accuracy repeatability of the falling edge of tooth	$< 3\%$ ( $\leq 6$ kHz)
	$< 5\%$ ( $\leq 10$ kHz)
Signal output	0.4 V to $< U_s$

### Environment

Target wheel diameter D	162.34 mm
Thickness t	12.5 mm
Width of teeth b1	3.8 mm
Width of gap b2	4.7 mm

Width of sync. gap b3	20.79 mm
Depth of teeth h	3.4 mm
Number of teeth	60-2

### Connectors and Wires

Connector	Please see Variations
Sleeve	HT wire $\varnothing$ 5.2 mm
Wire size	AWG 20
Wire length L	Please see Variations
Various motorsport and automotive connectors are available on request.	
Please specify the required wire length with your order.	

### Installation Notes

The Mini-HA-P sealed can be connected directly to most control units and data logging systems.

Please avoid abrupt temperature changes.

For mounting please use only the integrated plug.

If a wheel with different dimensions is used (see Environment), the technical function has to be tested individually.

Please ensure that the environmental conditions do not exceed the sensor specifications.

Please find further application hints in the offer drawing at our homepage.

### Safety Note

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

### Legal Restrictions

Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

### Ordering Information

#### Speed Sensor Hall-Effect Mini HA-P sealed

Connector ASL606-05PC-HE



Order number **F02U.V00.500-01**

#### Speed Sensor Hall-Effect Mini HA-P sealed


Without connector


Order number **F02U.V00.570-01**

### Dimensions

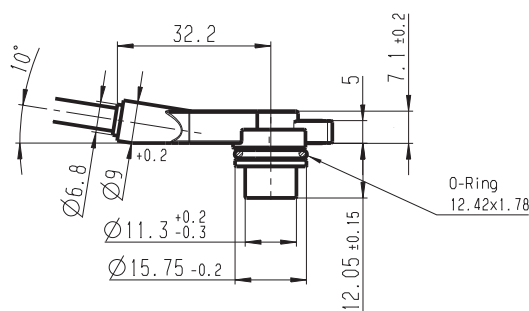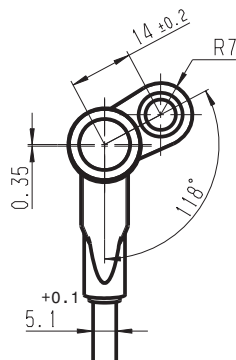

#### Mounting requirements



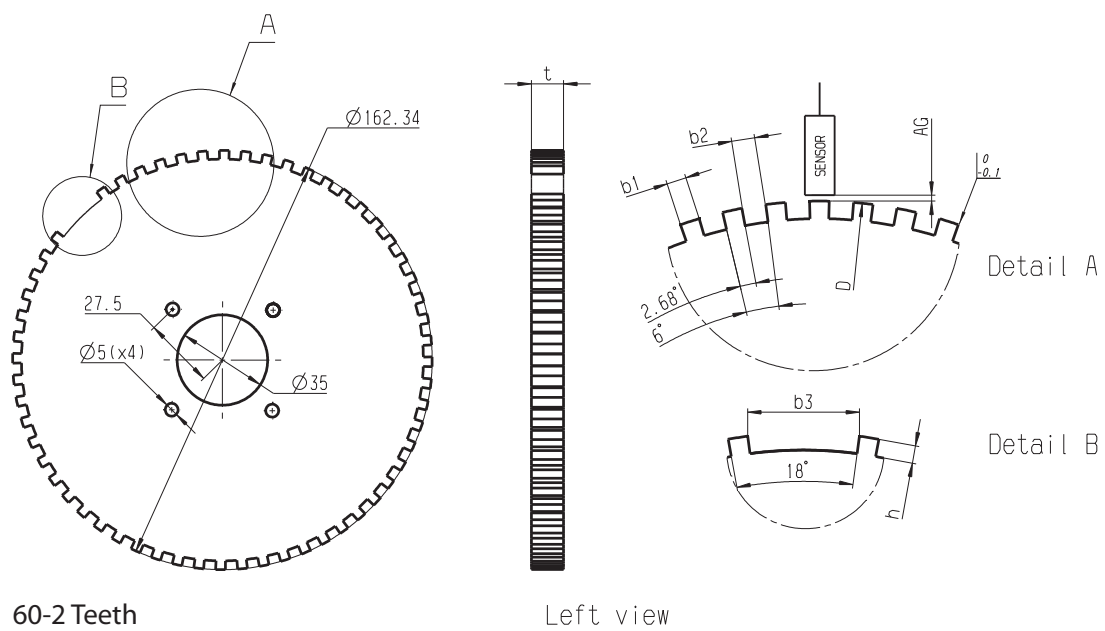

## Represented by:

**Europe:**  
Bosch Engineering GmbH  
Motorsport  
Robert-Bosch-Allee 1  
74232 Abstatt  
Germany  
motorsport@bosch.com  
www.bosch-motorsport.de

**North America:**  
Bosch Engineering North America  
Motorsport  
38000 Hills Tech Drive  
Farmington Hills, MI 48331-3417  
United States of America  
motorsport@bosch.com  
www.bosch-motorsport.com

**Asia-Pacific:**  
Bosch Engineering Japan K.K.  
Motorsports Department  
1-9-32 Nakagawachuo, Tsuzuki-ku  
Yokohama-shi  
Kanagawa, 224-8601  
Japan  
motorsport@jp.bosch.com  
www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
Robert Bosch Pty. Ltd  
Motorsport  
1555 Centre Road  
Clayton, Victoria, 3168  
Australia  
motor.sport@au.bosch.com  
www.bosch-motorsport.com.au