

# Vehicle Control Unit MS 50.4P incl. CCA



The VCU MS 50.4P (Performance) is a highly powerful processing / logging unit for race applications.

Based on our broad base of platform function, we support you with customized VCU functions for a tailor-made solution.

In addition, you can quickly develop your individual customer software based on MATLAB/Simulink to significantly speed up algorithm development (automatic code and documentation generation) – including extensive simulation capabilities.

## Application

Processor for customer code	866 MHz Dual Core
Processor for logger	866 MHz Dual Core
Configurable math channels	
User configurable CAN in/out messages	
Online data compression	
<b>Internal logger</b>	
<ul style="list-style-type: none"> <li>1,500 channels</li> <li>FULL_LOG_1 (4 GB memory on Partition 1) enabled</li> <li>PERF_LOG_1 (16 GB memory on Partition 1) optional</li> <li>FULL_LOG_2 (4 GB memory on Partition 2) enabled</li> <li>High Speed Logging Package (Sampling rate 5 µs) optional</li> <li>DATA_USB (Data copy to USB flash drive) enabled</li> </ul>	

## Logging rates

- Usage of all features: 800 kB/s
- Primary logging use case: >1,500 kB/s
- Logging data download rate: up to 7.5 MB/s

LTE Ethernet telemetry support

RS232 interface for GPS

Customer Code Area CCA

- ▶ 866 MHz Dual Core Processor exclusively for vehicle control functionality (MATLAB based)
- ▶ Identical, dedicated 866 MHz Dual Core Processor exclusively for logging purposes
- ▶ High Speed Logging 200 kHz of 6 analog inputs (optional)
- ▶ Event logging, Configurable pre-event logging

Provides the option to run customer developed software code on Bosch device

## Multi CCA

Enables the use of an extra core to utilize more computing power in the device for running a second customer model

## Technical Specifications

### Mechanical Data

Size	166 x 121 x 41 mm
Weight	≤ 660 g
Protection classification	IP67
3 motorsport connectors, 198 pins in total	
Max. vibration	Vibration profile 1 (see Downloads or <a href="http://www.bosch-motorsport.com">www.bosch-motorsport.com</a> )
Operating temperature internal	0 to 85°C
Operation outside the temperature limits can be tested on request during the manufacturing tests.	

### Electrical Data

Supply voltage	5 to 18 V
----------------	-----------

### Inputs

20 Analog channels 0 to 5 V, 0.5 % precision between 0.2 and 4.8 V, switchable pull-up

8 Digital PWM inputs  $f_{\text{max}}=30$  kHz Hall-type speed measurement possible, Switchable pullup 2.15 kOhm, (required for Hall), Tooth count differential\*

4 Digital PWM inputs  $f_{\max}=30$  kHz Hall- and DF11 type speed measurement possible,  
Fixed pullup 2.15 kOhm (required for Hall), Tooth count differential\*

4 universal Thermocouple

1 Bosch Laptrigger

1 TimeSync master and slave (specific to Bosch measurement system)

Internal measurements:

1 x ambient pressure

1 x ECU temperature

20 x supply voltage

20 x supply current

1 x battery voltage (external VCU supply)

1 x external VCU supply current

4 x HS output current

1 x 3-axis acceleration plus roll/pitch/yaw rate

### Outputs

2\* x PWM High side; 7.5 A each, PWM, 50 Hz

4\* x PWM Low side; 2.2 A each, PWM, 10 kHz

\*can be enhanced by Upgrade I/O Package

### Sensor Supplies and Screens

5\* x 12 V, 400 mA each

5\* x Switchable 5 V/12 V, 400 mA each

4 A max overall current on all 12 V

2 A max overall current on all 5 V

12 V  $\pm$  1 % precision on the pin

5 V  $\pm$  0.1 % precision on the pin

20 x Sensor ground

\*can be enhanced by Upgrade I/O Package

### Adaptation and Documentation

Function documentation	Automatically created during code generation
------------------------	--

MatLab code generation	Support for customer own MatLab function development
------------------------	--

### Software Tools (free download)

Data Analysis tool WinDarab 7

System Configuration tool RaceCon	Logger configuration, calibration, and online measurement
-----------------------------------	---

### Connectors

Connector LIFE (red) AS018-35PN	Mating connector AS618-35SN (not included)
------------------------------------	---

Connector SENS-A (yellow) AS018-35PA	Mating connector AS618-35SA (not included)
---	---

Connector SENS-B (blue) AS018-35PB	Mating connector AS618-35SB (not included)
---------------------------------------	---

### Communication

3 Ethernet 100 Mbit

4 CAN (+4 with Upgrade I/O Package)

1 LIN

1 USB

1 RS232 interface for GPS or Telemetry, switchable depending on SW version

1 Time sync synchronization Ethernet

### Installation Notes

Maintenance Interval: 220 h or a maximum of two years

Please remember that the mating connectors and the programming interface MSA-Box II are not included and must be ordered separately.

### Legal Restrictions

The sale of this product in Mexico is prohibited.  
Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

### Upgrades

#### I/O Package

##### Communication

4 CAN

##### Inputs

4 Analog channels

0 to 5 V,

0.5 % precision between 0.2 and 4.8 V, switchable pull-up

4 Digital PWM inputs

$f_{\max}=30$  kHz

Hall-type speed measurement possible,

Fixed pullup 2.15 kOhm (required for Hall),

Tooth count differential\*\*

4 LVDT, 5 pin configuration,  
excitation frequency 1 to 20 kHz,  
excitation voltage 0 to 5 V (rms)

##### Outputs

4 "TTL" Digital output, 10 kHz, PWM, 25 mA each

2 PWM High side; 7.5 A each, PWM, 50 Hz

4 PWM Low side; 2.2 A each, PWM, 10 kHz

##### Power Supplies

5 x 12 V, 400 mA each

5 switchable 5 V/12 V, 400 mA each

\*\* The tooth count differential between any two of the PWM inputs is available to measure e.g. shaft torsion.

### PERF\_LOG\_1

Increase logging Partition 1 from 4 GB to 16 GB memory

**High Speed Logging Package**

6 ANA

0 to 5 V, 200 kHz logging rate

**CCP/XCP\_MASTER**

Enables CCP/XCP master functionality to request data from foreign devices via CAN/CCP protocol, XCP over Ethernet (UDP) or XCP via CAN.

(ASAP2 file from ECU manufacturer required)


Connector code: blue




Order number **F02U.V02.295-01****Breakout Box BOB 66-pole**

Connector code: yellow

Order number **F02U.V02.298-01****Software Options****I/O Package**Order number **F02U.V02.777-01****PERF\_LOG\_1**Order number **F02U.V03.054-01****High Speed Logging Package**Order number **F02U.V02.779-01****CCP/XCP\_MASTER**Order number **F02U.V02.213-01****Accessories****Opening tool for shellsize 18**Order number **F02U.V01.394-01****Breakout Box BOB MS 7**

Connector code: red

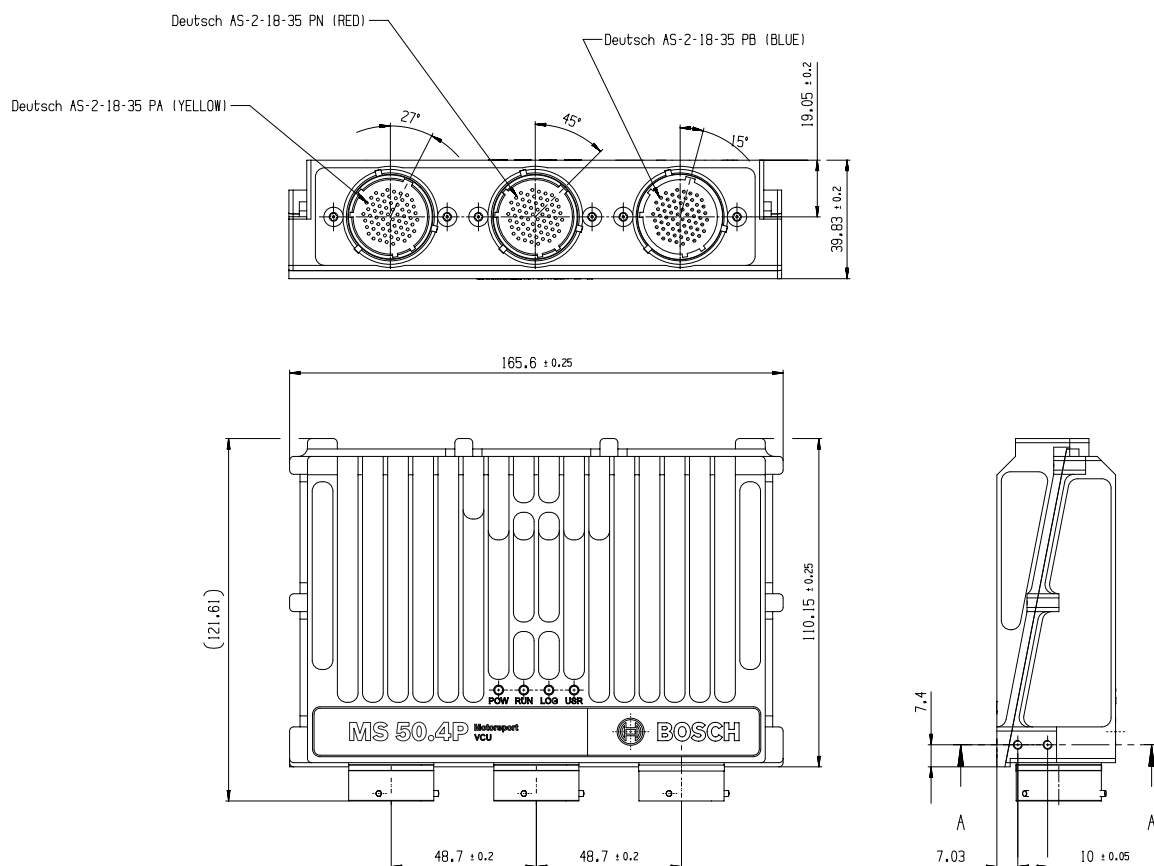Order number **F02U.V02.293-01****Ordering Information****Vehicle Control Unit MS 50.4P incl. CCA**Order number **F02U.V03.014-01****Rugged USB flash drive**Order number **F02U.V03.534-01****Connector for USB flash drive on car loom side**Order number **F02U.002.996-01****Adapter cable to PC USB-Port**Order number **F02U.V01.343-01****Breakout Box BOB 66-pole****Dimensions**

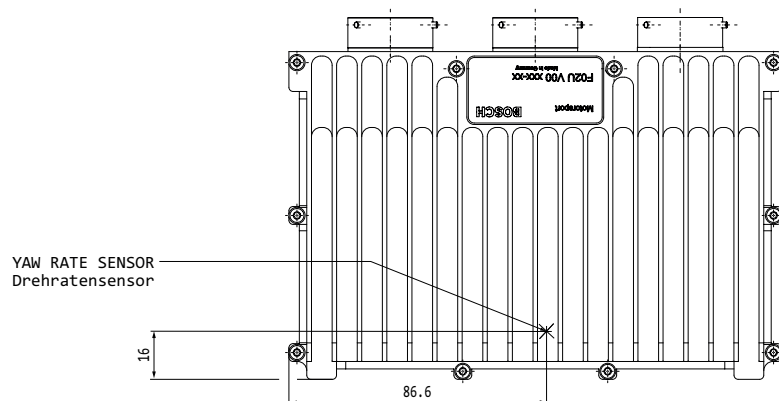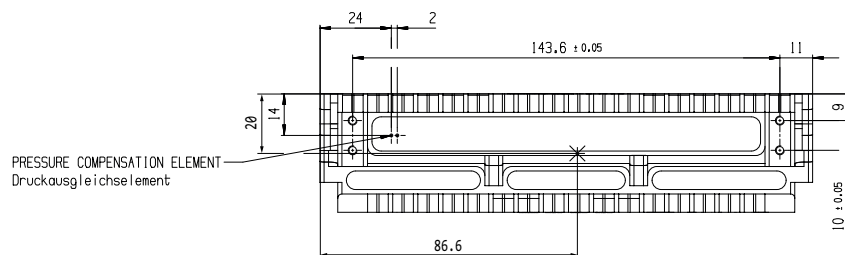

## Represented by:

**Europe:**  
Bosch Engineering GmbH  
Motorsport  
Robert-Bosch-Allee 1  
74232 Abstatt  
Germany  
Tel.: +49 7062 911 9101  
Fax: +49 7062 911 79104  
motorsport@bosch.com  
www.bosch-motorsport.de

**North America:**  
Bosch Engineering North America  
Motorsport  
38000 Hills Tech Drive  
Farmington Hills, MI 48331-3417  
United States of America  
Tel.: +1 248 876 2977  
Fax: +1 248 876 7373  
motorsport@bosch.com  
www.bosch-motorsport.com

**Asia-Pacific:**  
Bosch Engineering Japan K.K.  
Motorsports Department  
1-9-32 Nakagawachuo, Tsuzuki-ku  
Yokohama-shi  
Kanagawa, 224-8601  
Japan  
Tel.: +81 45 605 3032  
Fax: +81 45 605 3059  
www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
Robert Bosch Pty. Ltd  
Motorsport  
1555 Centre Road  
Clayton, Victoria, 3168  
Australia  
Tel.: +61 (3) 9541 3901  
motor.sport@au.bosch.com