


Rotary Position Sensor RPS-F

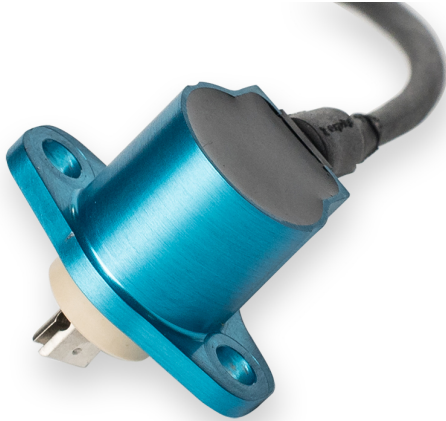

- ▶ Rotational movement measurement
- ▶ Hall effect technology
- ▶ Measurement range: 0 to 360° possible
- ▶ Analogue output 0.2 to 4.8 V
- ▶ Dual output, fully redundant possible

This sensor is designed to measure rotational movement of throttle position. The electrical circuit is designed with a magnetic rotary sensor using a Hall element and digital signal processing; sensor output is ratiometric. The angular position is provided by a two pole magnet integrated in the sensor shaft. The main benefit of this sensor is its contactless Hall effect technology and its robust design for motorsport applications which includes fully redundant power and ground.

Application

Application	0 to 360° possible
Operating temperature range	0 to 150°C
Max. vibration	200 m/s ² at 5 to 2,000 Hz

Technical Specifications

Mechanical Data

Weight w/o wire	< 36 g
Protection class	IP58
Mounting	2 x M4 screw
Lifetime	5 x 10 ⁶ operations of ±65°
Housing	Aluminum


Electrical Data

Power supply U _s	5 ± 0.5 V regulated
Max. overvoltage	24 V
Half voltage tolerance	± 2°
Supply current	< 12.5 mA
Resolution	< 0.1°

Output voltage range	Ratiometric analog
Output load	> 10 kOhm

Characteristic

Max. rotation speed	600 ^{RPM}
Temp. coefficient	± 0.008° Rotation/°C 30°C nominal
Direction of rotation	Both
Redundancy	Yes

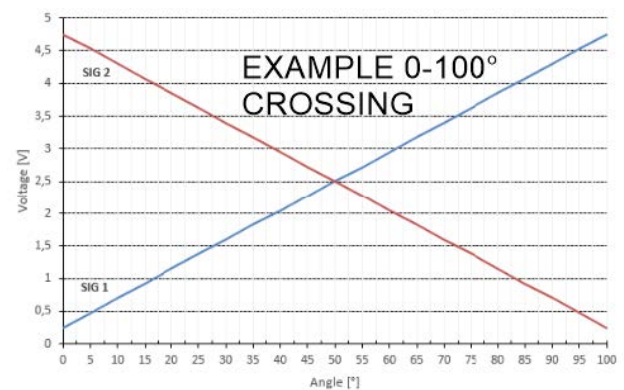

Flying lead and Wires

Red	U _s 1
Blue	Gnd 1
White	Sig 1
Orange	U _s 2
Green	Gnd 2
Yellow	Sig 2
Sleeve	DR-25
Wire size	AWG 26
Wire length L	100 cm

Installation Notes

- The products of the RP series can be connected directly to most control units.
- The sensor is designed with contactless Hall effect technology.
- Any mounting orientation is possible.
- Sensor is at mid point of electrical angle when shaft and wire exit are aligned as shown in the offer drawing.
- Please find further application hints in the offer drawing at our homepage.

Safety Note

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

Fulfilled Legal Standards/Legal Requirements

EMC Requirements	UNECE10
------------------	---------

Ordering Information

Rotary Position Sensor RPS-F

Single output, 360° range
Order number **F 02U V0U 400-01**

Rotary Position Sensor RPS-F

Dual output, 100° range, crossing signals (throttle)
Order number **F 02U V0U 401-01**


Rotary Position Sensor RPS-F

Dual output, 40° range, second signal 50 % of first (pedal)
Order number **F 02U V0U 402-01**

Rotary Position Sensor RPS-F

Dual output, 100° range, second signal 50 % of first (pedal)
Order number **F 02U V0U 403-01**

Dimensions

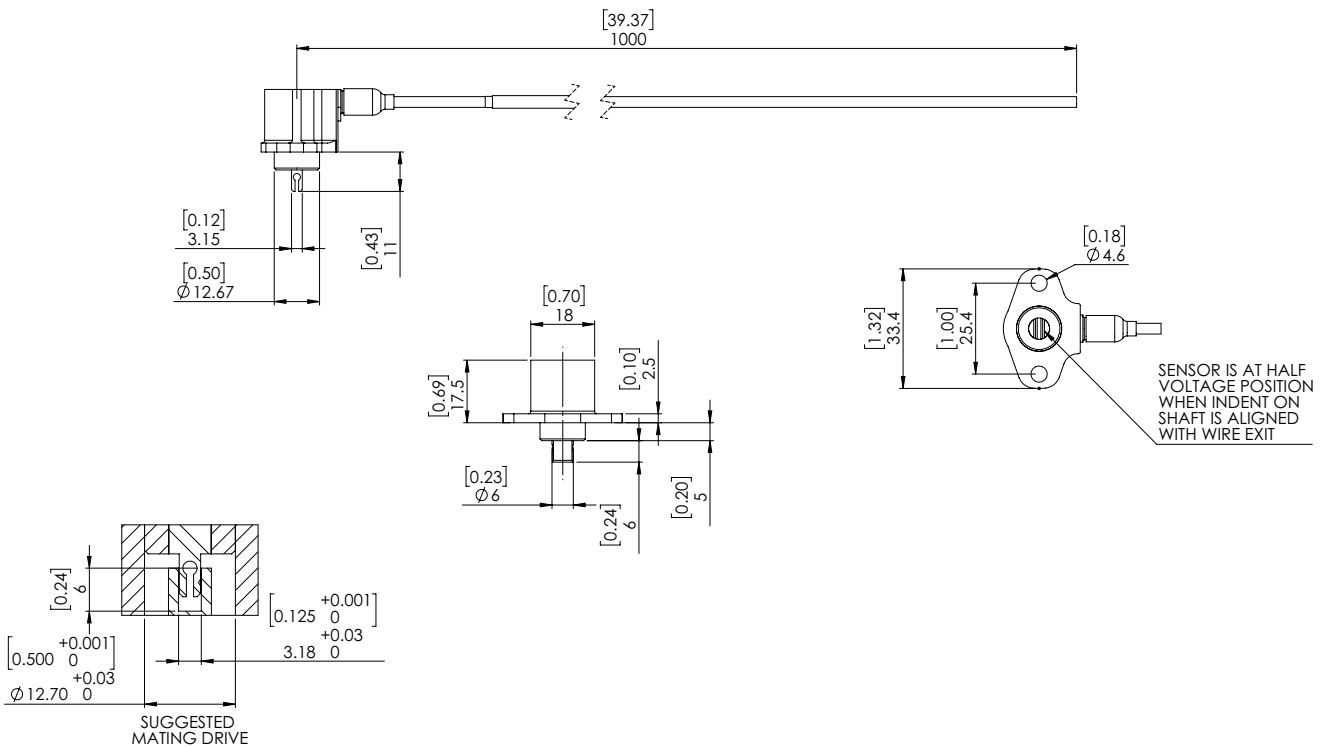

Represented by:

Europe:
Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
Tel.: +49 7062 911 9101
Fax: +49 7062 911 79104
motorsport@bosch.com
www.bosch-motorsport.de

North America:
Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
Tel.: +1 248 876 2977
Fax: +1 248 876 7373
motorsport@bosch.com
www.bosch-motorsport.com

Asia-Pacific:
Bosch Engineering Japan K.K.
Motorsport
18F Queen's Tower C, 2-3-5 Minato
Mirai Nishi-ku, Yokohama-shi
Kanagawa 220-6218
Japan
Tel.: +81 45 650 5610
Fax: +81 45 650 5611
www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
Robert Bosch Pty. Ltd
Motorsport
1555 Centre Road
Clayton, Victoria, 3168
Australia
Tel.: +61 (3) 9541 3901
motor.sport@au.bosch.com