

# Pressure Sensor Fluid PSC-10



- ▶ Application: 0 to 10 bar
- ▶ Response time: 1.5 ms (5 V Variant) or 1 ms (12 V Variant)
- ▶ Pressure reference type: Absolut
- ▶ Power supply: 5 or 12 V
- ▶ Weight: 45 g

This sensor is designed to measure absolute pressure of various kinds of media e.g. Diesel, gasoline, water, engine oil, transmission oil or air. The sensor is available for two different supply voltage ranges. The sensor uses stainless steel measuring cells with piezo-resistive measuring bridges in thin layer technique, which are hermetically welded together with stainless steel pressure ports. This guarantees a complete media compatibility. The main benefit of this sensor is the high quality of a production part at a low price.

## Application

Application	0 to 10 bar (a)
Pressure reference type	absolute
Max. pressure	20 bar
Operating temp. range	-40 to 125°C
Media temp. range	-40 to 125°C
Storage temp. range	-20 to 50°C
Bio fuel compatibility	E 85 / M 100
Max. vibration	100 m/s <sup>2</sup> rms at 10 to 2,000 Hz

## Technical Specifications

### Variations

	PSC-10 (5 V)	PSC-10 (12 V)
Power supply $U_s$	4.75 to 5.25 V	9 to 30 V
Full scale output $U_A$	10 to 90 % $U_s$ ratiometric	0 to 5 V non-ratiometric
Response time T10/90	1.5 ms	1.0 ms

Sensitivity	400 mV/bar at $U_s = 5$ V	500 mV/bar
Offset	500 mV at $U_s = 5$ V	0 mV
Pin 1	-	$U_s$
Pin 2	Gnd	Gnd
Pin 3	Sig	Sig
Pin 4	$U_s$	-
Pin 5	-	-

### Mechanical Data

Male thread	M10x1
Wrench size	19 mm
Installation torque	15 Nm
Weight w/o wire	45 g
Sealing	O-ring 8.1 x 1.6 mm

### Electrical Data

Power supply $U_s$	Please see variations
Max power supply $U_s$ max	± 30 V
Full scale output $U_A$	Please see variations
Current $I_s$	8 mA

### Characteristic

Response time T10/90	Please see variations
Compensated range	0 to 90°C
Tolerance (FS) at $U_s = 5$ V	± 0.1 bar
Tolerance (FS)	± 1 %
Sensitivity	Please see variations
Offset	Please see variations

## Connectors and Wires

Connector	ASL606-05PC-HE
Mating connector	F02U.000.228-01
ASL006-05SC-HE	
Sleeve	DR-25
Wire size	AWG 24
Wire length L	13 to 95 cm
Various motorsport and automotive connectors are available on request.	
Please specify the required wire length with your order.	

## Installation Notes

- The PSC-10 can be connected directly to most control units.
- The sensor has a protection for over voltage, reverse polarity and short-circuit.
- Please do not fix the sensor directly to the engine block to avoid undesired strong vibrations.
- Each mounting orientation is possible.
- The sensor meets all EMV, EMC and ESD automotive standards.

Please find further application hints in the offer drawing and free download of the sensor configuration file (\*.sdf) for the Bosch Data Logging System at our homepage.

## Safety Note

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

## Legal Restrictions


Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

## Ordering Information

**Pressure Sensor Fluid PSC-10**  
4.75 to 5.25 V  
Order number **F02U.V01.268-01**

**Pressure Sensor Fluid PSC-10**  
9 to 30 V  
Order number **F02U.V01.295-01**

## Dimensions

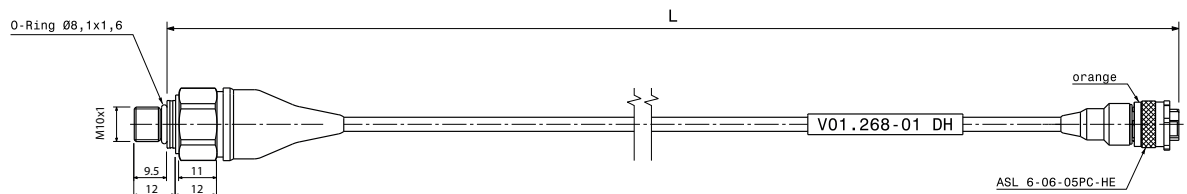

### Represented by:

**Europe:**  
Bosch Engineering GmbH  
Motorsport  
Robert-Bosch-Allee 1  
74232 Abstatt  
Germany  
Tel.: +49 7062 911 9101  
Fax: +49 7062 911 79104  
motorsport@bosch.com  
www.bosch-motorsport.de

**North America:**  
Bosch Engineering North America  
Motorsport  
38000 Hills Tech Drive  
Farmington Hills, MI 48331-3417  
United States of America  
Tel.: +1 248 876 2977  
Fax: +1 248 876 7373  
motorsport@bosch.com  
www.bosch-motorsport.com

**Asia-Pacific:**  
Bosch Engineering Japan K.K.  
Motorsport  
18F Queen's Tower C, 2-3-5 Minato  
Mirai Nishi-ku, Yokohama-shi  
Kanagawa 220-6218  
Japan  
Tel.: +81 45 650 5610  
Fax: +81 45 650 5611  
www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
Robert Bosch Pty. Ltd  
Motorsport  
1555 Centre Road  
Clayton, Victoria, 3168  
Australia  
Tel.: +61 (3) 9541 3901  
motor.sport@au.bosch.com