

Pressure Sensor Fluid PSM-SA



- ▶ Application: 0 to 3.5, 6, 10, 20, 35, 60, 70, 100, 200, 350, 700 bar
- ▶ Response time: 1 ms
- ▶ Pressure reference type: Absolut
- ▶ Power supply: 8 to 30 V
- ▶ Weight: 13 g

This sensor is designed to measure absolute pressure of various kinds of media e.g. Diesel, gasoline, water, engine oil, transmission oil or air. The sensor utilizes a flush metal diaphragm as a force collector. The force is transferred to a solid state piezo-resistive sensing element via a thin intervening film of noncompressible silicone oil. The housing is welded hermetically. An individual calibration sheet will be delivered with each sensor. The main feature and benefit of this sensor is a good protection against vibrations.

Application

Pressure measurement range versions	3.5 to 700 bar
Pressure reference type	absolute
Operating temp. range	-40 to 150°C
Vibration	2 g (10 Hz to 60 Hz) and 20 g (60 Hz to 1 KHz)
Shock (1/2 sine)	50 g (11 ms) and 200 g (6 ms)
Bio fuel compatibility	E85/M100

Technical Specifications

Mechanical Data

Housing	Stainless steel
Male thread	M8x1
Wrench size	11 mm
Installation torque	2.5 Nm max.
Weight	13 g + 20 g per meter of cable
Sealing	O-ring 6.35 x 1.6 VITON

Ingress Protection	IP66
--------------------	------

Electrical Data

Supply voltage	8 to 32 V DC
Max current	< 8 mA
Non-Repeatability	± 0.05 % FSO typ.
CNL & H	± 0.25 % FSO
Bandwidth (-3 dB)	400 Hz
Output "FSO"	0.5 to 4.5 V = 4 V ± 50 mV

Characteristic

Compensated range	20 to 120°C
Long term stability	Offset = 0.1 % span/year; Span = 0.1 %/year
Zero offset at 23°C	0.5 V ± 50 mV (0.5 ± 100 mV for ranges ≤ 10 bar or 150 psi)
Sensitivity/Offset	(an individual calibration sheet will be delivered)
Thermal zero shift "TZS"	± 1 % FSO/100°C (± 2 % FSO/100°C for ranges ≤ 10 bar or 150 psi)
Thermal sensitivity shift "TSS"	± 1 %/100°C (± 1.5 %/100°C for ranges ≤ 10 bar or 150 psi)

Connectors and Wires

Connector	ASU603-05PC-HE
Mating connector	F02U.000.208-01
ASU003-05SC-HE	
Pin 1	U _s
Pin 2	Gnd

Pin 3	Sig
Pin 4	-
Pin 5	Scr
Sleeve	Viton
Wire size	AWG 24
Wire length L	15 to 100 cm
Various motorsport and automotive connectors are available on request.	
Please specify the required wire length with your order.	

Installation Notes

- The PSM-SA can be connected directly to most control units.
- Each mounting orientation is possible.
- Please do not fix the sensor directly to the engine block to avoid undesired strong vibrations.
- 100 % relative humidity is possible.
- The sensor meets all EMV, EMC and ESD automotive standards.
- Please find further application hints in the offer drawing at our homepage.

Safety Note

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

Legal Restrictions


Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

Ordering Information


- Pressure Sensor Fluid PSM-SA**
0 to 3.5 bar
Order number **F02U.V01.946-01**
- Pressure Sensor Fluid PSM-SA**
0 to 6 bar
Order number **F02U.V01.947-01**
- Pressure Sensor Fluid PSM-SA**
0 to 10 bar
Order number **F02U.V01.948-01**
- Pressure Sensor Fluid PSM-SA**
0 to 20 bar
Order number **F02U.V01.949-01**
- Pressure Sensor Fluid PSM-SA**
0 to 35 bar
Order number **F02U.V01.950-01**
- Pressure Sensor Fluid PSM-SA**
0 to 60 bar
Order number **F02U.V01.951-01**
- Pressure Sensor Fluid PSM-SA**
0 to 70 bar
Order number **F02U.V01.724-01**
- Pressure Sensor Fluid PSM-SA**
0 to 100 bar
Order number **F02U.V01.952-01**
- Pressure Sensor Fluid PSM-SA**
0 to 200 bar
Order number **F02U.V01.953-01**
- Pressure Sensor Fluid PSM-SA**
0 to 350 bar
Order number **F02U.V01.954-01**
- Pressure Sensor Fluid PSM-SA**
0 to 700 bar
Order number **F02U.V02.064-01**

Dimensions


View A
Scale: 2:1

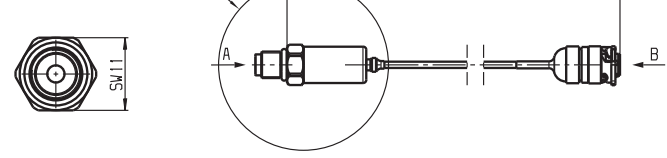


View B
Scale: 2:1
Electrical connection

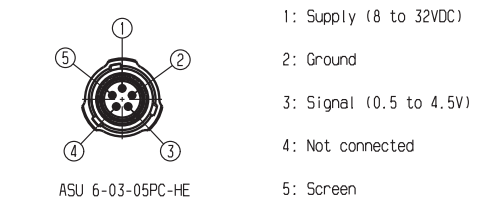

Recommended mounting port



Detail A
Scale: 2:1

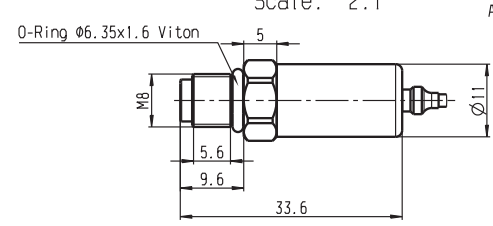

Represented by:

Europe:

Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
Tel.: +49 7062 911 9101
Fax: +49 7062 911 79104
motorsport@bosch.com
www.bosch-motorsport.de

North America:

Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
Tel.: +1 248 876 2977
Fax: +1 248 876 7373
motorsport@bosch.com
www.bosch-motorsport.com

Asia-Pacific:

Bosch Engineering Japan K.K.
Motorsport
18F Queen's Tower C, 2-3-5 Minato
Mirai Nishi-ku, Yokohama-shi
Kanagawa 220-6218
Japan
Tel.: +81 45 650 5610
Fax: +81 45 650 5611
www.bosch-motorsport.jp

Australia, New Zealand and South

Africa:
Robert Bosch Pty. Ltd
Motorsport
1555 Centre Road
Clayton, Victoria, 3168
Australia
Tel.: +61 (3) 9541 3901
motor.sport@au.bosch.com