

# Vehicle Control Unit MS 50.4 CAN-FD



The VCU MS 50.4 CAN-FD is a highly powerful processing / logging unit for race applications. Based on our broad base of platform function, we support you with customized VCU functions for a tailor-made solution. In addition, you can quickly develop your individual customer software based on MATLAB/Simulink to significantly speed up algorithm development (automatic code and documentation generation, requires CCA package) – including extensive simulation capabilities.

## Application

Processor for customer code	667 MHz Dual Core
Processor for logger	667 MHz Dual Core
Configurable math channels	
User configurable CAN in/out messages	
Online data compression	
<b>Internal logger</b>	
<ul style="list-style-type: none"> <li>1,500 channels</li> <li>FULL_LOG_1 (4 GB memory on Partition 1) enabled</li> <li>PERF_LOG_1 (16 GB memory on Partition 1) optional</li> <li>FULL_LOG_2 (4 GB memory on Partition 2) enabled</li> <li>High Speed Logging Package (Sampling rate 5 µs) optional</li> <li>DATA_USB (Data copy to USB flash drive) enabled</li> </ul>	
<b>Logging rates</b>	
<ul style="list-style-type: none"> <li>Usage of all features: 600 kB/s</li> <li>Primary logging use case: &gt;1,200 kB/s</li> <li>Logging data download rate: up to 6.2 MB/s</li> </ul>	
LTE Ethernet telemetry support	
RS232 interface for GPS	

- ▶ 667 MHz Dual Core Processor exclusively for vehicle control functionality (MATLAB based)
- ▶ Identical, dedicated 667 MHz Dual Core Processor exclusively for logging purposes
- ▶ High Speed Logging 200 kHz of 6 analog inputs (optional)
- ▶ Up to 8 CAN buses, CAN 3 to CAN 8 are CAN-FD compatible

## Technical Specifications

### Mechanical Data

Size	166 x 121 x 41 mm
Weight	≤ 660 g
Protection classification	IP67
3 motorsport connectors, 198 pins in total	
Max. vibration	Vibration profile 1 (see Downloads or <a href="http://www.bosch-motorsport.com">www.bosch-motorsport.com</a> )
Operating temperature internal	-20 to 80°C

### Electrical Data

Supply voltage	5 to 18 V
----------------	-----------

### Inputs

20 x Analog channels 0 to 5 V, 0.5 % precision between 0.2 and 4.8 V, switchable pull-up
8 x Digital PWM inputs f <sub>max</sub> =30 kHz Hall-type speed measurement possible, Switchable pullup 2.15 kOhm, (required for Hall), Tooth count differential*
4 x Digital PWM inputs f <sub>max</sub> =30 kHz Hall- and DF11 type speed measurement possible, Fixed pullup 2.15 kOhm (required for Hall), Tooth count differential*
4 x universal Thermocouple
1 x Bosch Laptrigger
1 x TimeSync master and slave (specific to Bosch measurement system)
Internal measurements:

1 x ambient pressure  
 1 x ECU temperature  
 20 x supply voltage  
 20 x supply current  
 1 x battery voltage (external VCU supply)  
 1 x external VCU supply current  
 4 x HS output current  
 1 x 3-axis acceleration plus roll/pitch/yaw rate

### Outputs

2\* x 7.5 A each, PWM High side, 50 Hz  
 4\* x 2.2 A each, PWM Low side, 10 kHz  
 \*can be enhanced by Upgrade I/O Package

### Sensor Supplies and Screens

5\* x 12 V, 400 mA each  
 5\* x Switchable 5 V/12 V, 400 mA each  
 4 A max overall current on all 12 V  
 2 A max overall current on all 5 V  
 12 V  $\pm$  1 % precision on the pin  
 5 V  $\pm$  0.1 % precision on the pin  
 20 x Sensor ground  
 \*can be enhanced by Upgrade I/O Package

### Adaptation and Documentation

Function documentation	Automatically created during code generation
MatLab code generation	Support for customer own MatLab function development

### Software Tools (free download)

Data Analysis tool WinDarab 7	
System Configuration tool RaceCon	Logger configuration, calibration, and online measurement

### Connectors

Connector LIFE (red) AS018-35PN	Mating connector AS618-35SN (not included)
Connector SENS-A (yellow) AS018-35PA	Mating connector AS618-35SA (not included)
Connector SENS-B (blue) AS018-35PB	Mating connector AS618-35SB (not included)

### Communication

3 Ethernet 100 Mbit  
 4 CAN (+4 with Upgrade I/O Package), CAN 3 to CAN 8 are CAN-FD compatible  
 1 LIN  
 1 USB  
 1 RS232 interface for GPS or Telemetry, switchable depending on SW version  
 1 Time sync synchronization Ethernet

### Installation Notes

Maintenance Interval: 220 h or a maximum of two years

Please remember that the mating connectors and the programming interface MSA-Box II are not included and must be ordered separately.

### Upgrades

#### CCA Hardware Upgrade per device

Provides the option to run customer developed software code on Bosch device

#### Multi CCA Hardware Upgrade per device

Enables the use of an extra core to utilize more computing power in the device

### I/O Package

#### Communication

4 CAN

#### Inputs

4 Analog channels  
 0 to 5 V,  
 0.5 % precision between 0.2 and 4.8 V, switchable pull-up

4 Digital PWM inputs  
 $f_{\max}$ =30 kHz  
 Hall-type speed measurement possible,  
 Fixed pullup 2.15 kOhm (required for Hall),  
 Tooth count differential\*\*

4 LVDT, 5 pin configuration,  
 excitation frequency 1 to 20 kHz,  
 excitation voltage 0 to 5 V (rms)

#### Outputs

4 "TTL" Digital output, 10 kHz, PWM, 25 mA each  
 2 PWM High side; 7.5 A each, PWM, 50 Hz  
 4 PWM Low side; 2.2 A each, PWM, 10 kHz

#### Power Supplies

5 x12 V, 400 mA each  
 5 switchable 5 V/12 V, 400 mA each

\*\* The tooth count differential between any two of the PWM inputs is available to measure e.g., shaft torsion.

### High Speed Logging Package

6 ANA 0 to 5 V, 200 kHz logging rate

### CCP/XCP\_MASTER

Enables CCP/XCP master functionality to request data from foreign devices via CAN/CCP protocol, XCP over Ethernet (UDP) or XCP via CAN.  
 (ASAP2 file from ECU manufacturer required)

### Ordering Information

**Vehicle Control Unit MS 50.4 CAN-FD**  
 Order number **F02U.V03.514-01**

**Rugged USB flash drive**Order number **F02U.V03.534-01****Connector for USB flash drive on car loom side**Order number **F02U.002.996-01****Adapter cable to PC USB-Port**Order number **F02U.V01.343-01****Breakout Box BOB 66-pole**

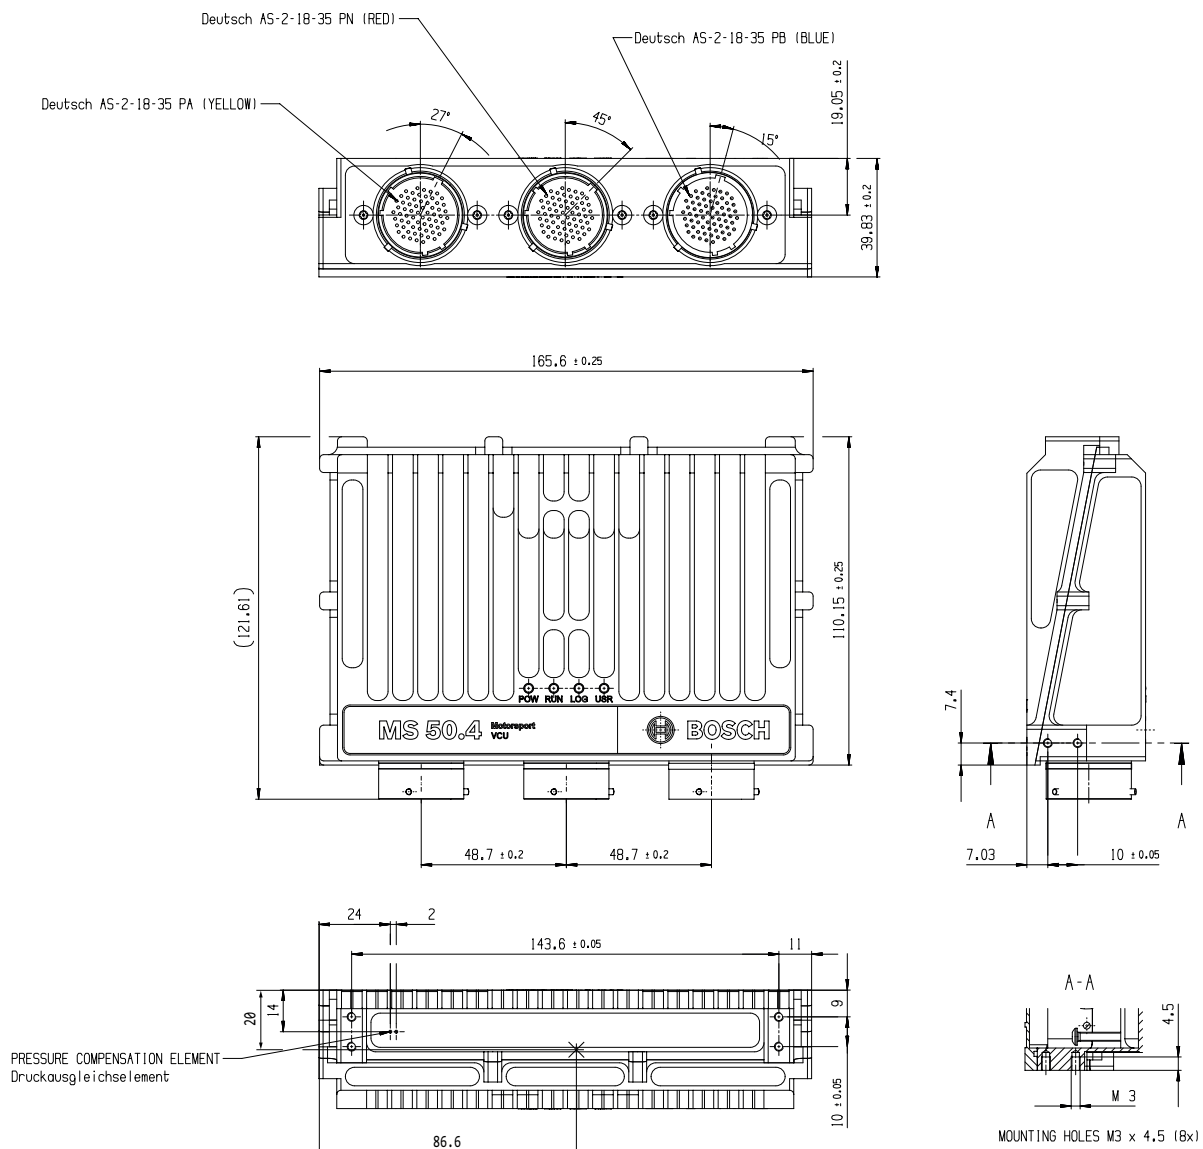
Connector code: blue

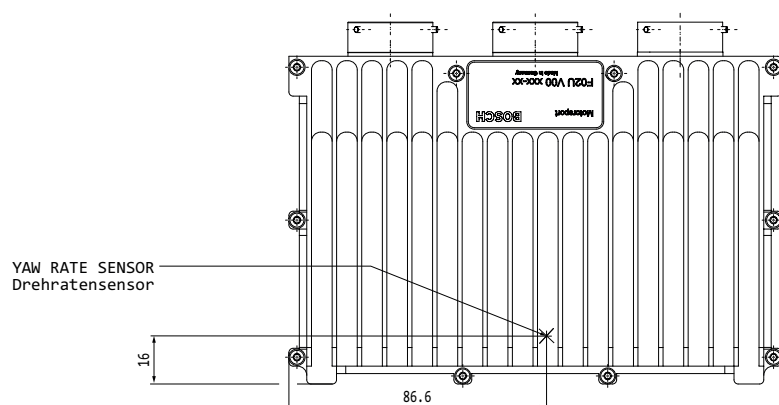
Order number **F02U.V02.295-01****Breakout Box BOB 66-pole**

Connector code: yellow

Order number **F02U.V02.298-01****Breakout Box BOB MS 7**

Connector code: red

Order number **F02U.V02.293-01****Software Options****CCA Hardware Upgrade per device**Order number **F02U.V02.137-01****Multi CCA Hardware Upgrade VCU per device**Order number **F02U.V03.222-01****I/O Package**Order number **F02U.V02.777-01****High Speed Logging Package**Order number **F02U.V02.779-01****CCP/XCP\_MASTER**Order number **F02U.V02.213-01****Real Time Ethernet**Order number **F02U.V02.782-01****Accessories****Opening tool for shellsize 18**Order number **F02U.V01.394-01****Dimensions**

**Represented by:**

**Europe:**  
Bosch Engineering GmbH  
Motorsport  
Robert-Bosch-Allee 1  
74232 Abstatt  
Germany  
motorsport@bosch.com  
www.bosch-motorsport.de

**North America:**  
Bosch Engineering North America  
Motorsport  
38000 Hills Tech Drive  
Farmington Hills, MI 48331-3417  
United States of America  
motorsport@bosch.com  
www.bosch-motorsport.com

**Asia-Pacific:**  
Bosch Engineering Japan K.K.  
Motorsports Department  
1-9-32 Nakagawachuo, Tsuzuki-ku  
Yokohama-shi  
Kanagawa, 224-8601  
Japan  
motorsport@jp.bosch.com  
www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
Robert Bosch Pty. Ltd  
Motorsport  
1555 Centre Road  
Clayton, Victoria, 3168  
Australia  
motor.sport@au.bosch.com  
www.bosch-motorsport.com.au