


Engine Control Unit MS 6.4P EVO

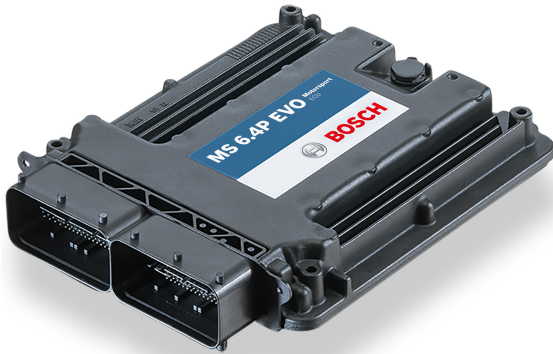

- ▶ 866 MHz Dual Core Processor for projects with high performance demand
- ▶ Supports Customer Code Area CCA
- ▶ 4 GB memory plus 16 GB upgrade
- ▶ SENT sensor support

The MS 6.4P EVO engine control unit manages gasoline engines up to 12 cylinders. The MS 6 family provides high control performance, logging capabilities and an extensive feature set to improve performance in your application. It features a powerful digital processing core and a high-end FPGA for ultimate performance and flexibility. Custom functions can be provided quickly and easily as a service or implemented as customer code with MATLAB/Simulink. The MS 6 family is fully integrated into the Bosch Motorsport system architecture.

Hint: Specific Software Version for MS 6.4P EVO needed, not compatible with MS 6.4 EVO software.

Application

High pressure injection

Integrated power stages for the use of:

- 4 cylinders up to 12,500 rpm
- 6 cylinders up to 9,500 rpm
- 8 cylinders up to 8,500 rpm

(depending on injection types and pressure ranges)

High Pressure Injection Package inclusive

Enables the control of a 2nd high pressure pump

Low pressure injection

- Max. 12 cylinders up to 12,500 rpm, high impedance injectors only

Ignition

- 12 x ignition control, IGBT or BJT, coils with integrated amplifier

Physical engine model for fast application

- determine engine load by throttle position or air pressure signals

- mixture control and basic ignition guided by main signal relative load rI
- Subsystems pit speed-, launch-, rpm-limiter and ASR are integrated inside torque control
- Separated power cut functions to assist various gear cut systems
- Diagnostics
- Integrated safety strategy for 2 electronic throttle controls

Integrated support of manual gearshift

Electronic throttle control

Variable Valve Timing VVT

Turbo control

Traction control

Launch control

LTE Ethernet telemetry support

Internal logger

- 4 GB memory on Partition 1 enabled
- 100 free configurable channels, 20 Hz
- FULL_LOG_1 (1,500 channels/1 kHz sampling rate on Partition 1) optional
- PERF_LOG_1 (16 GB memory on Partition 1) optional
- FULL_LOG_2 (4 GB memory/1,500 channels/1 kHz sampling rate on Partition 2) optional

Logging rates

- Usage of all features: 400 kB/s
- Primary logging use case: 800 kB/s
- Logging data download rate: up to 5 MB/s

Technical Specifications

Mechanical Data

Aluminum housing

2 Bosch connectors

196 pins in total

Size	226 x 181 x 44 mm
Weight	1,086 g
Protection Classification	IP54
Temp. range (at internal sensors)	0 to 80°C

Electrical Data

Power supply	6 to 18 V
CPU	Dual Core 866 MHz, FPGA

Inputs

38 analog inputs

6 x reserved for electronic throttle controls
10 x no integrated pull-up
4 x option for angle synchronous measurement, no integrated pull-up
5 x fixed 3.01 kOhm pull-up
13 x switchable 3.01 kOhm pull-up

8 analog/digital inputs (shared)

8 x option for angle synchronous measurement / digital (e.g. SENT)
--

6 internal measurements

1 x ambient pressure
1 x acceleration 6-axis
2 x ECU temperature
2 x ECU voltage

9 function related inputs

2 x thermocouple exhaust gas temperature sensors (K-type)
2 x Lambda interfaces for LSU 4.9 sensor types
1 x lap trigger/beacon input
4 x knock sensors

10 digital inputs

1 x switchable Hall or inductive sensor for flywheel measurement
2 x Hall sensor for sync wheel detection
4 x switchable Hall or DF11 sensors for camshaft position or wheel speed
2 x switchable Hall or inductive sensors for turbo speed measurement
1 x digital switch for engine ON/OFF

Sensor supplies and screens

4 x sensor supplies 5 V / 50 mA
3 x sensor supplies 5 V / 150 mA
7 x sensor grounds
2 x sensor screens

Outputs

38 function related outputs

High Pressure Injection

- 2 x high pressure pump with MSV control
- 8 x high pressure injection for magnetic injectors

Low Pressure Injection

- 12 x 2.2 A low pressure injection for high impedance injectors

Ignition

- 12 x ignition control, IGBT or BJT, coils with integrated amplifier

- 2 x 8.5 A H-bridge reserved for electronic throttle

- 2 x 4 A pwm lowside switch for Lambda heater

19 freely configurable outputs

- 1 x 8.5 A H-bridge
- 2 x 4 A pwm lowside switch
- 4 x 3 A pwm lowside switch
- 8 x 2.2 A pwm lowside switch
- 4 x 1 A pwm lowside switch

3 output signals

- 1 x engine rpm
- 1 x flywheel
- 1 x trigger wheel

Software Tools (free download)

Data Analysis tool WinDarab V7
System Configuration tool RaceCon 2.7.0.9 or later

Mating Connectors (not included)

Mating Connector 91 pins	F02U.B00.711-01
Mating Connector 105 pins	F02U.B00.712-01

Norms

Product Safety
EN IEC 62368-1:2020+A11:2020

Materials

REACH - Nr. 1907/2006

EMC

UNECE10:rev.6/AMD1:2020
KN41
ISO11452-2
ISO11452-4
ISO10605
ISO7637-2
ISO7367-3
ISO16750-2
US FCC: Title 47, Part 15 Subpart B
ICES-003

Testing

SAEJ1211

Communication

2 Ethernet

3 CAN

1 LIN

8 SENT

1 RS232

1 Time sync synchronization Ethernet

3 Communication screens

Installation Notes

Maintenance Interval: 220 h or a maximum of two years

Depending on your experiences with calibration of ECUs, we recommend calibration support from Bosch Motorsport.

Please remember that the mating connectors and the programming interface MSA-Box II are not included and must be ordered separately.

Legal Restrictions

The sale of this product in Mexico is prohibited. Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

Upgrades**CCA Hardware Upgrade per device**

Provides the option to run customer developed software code on Bosch ECU

FULL_LOG_1

Extension for Partition 1

- 1,500 channels
- 1 kHz sampling rate

PERF_LOG_1 (requires FULL_LOG_1)

Increase logging Partition 1 from 4 GB to 16 GB memory

FULL_LOG_2

Activation of Partition 2

- 1,500 channels
- 1 kHz sampling rate
- 4 GB memory

Gear Control Package 1

Gear control MEGA-Line functionality, has to be used with MEGA-Line components (License model via MEGA-Line)

-- [Link to MEGA-Line Support Request](#) ---- [Link to MEGA-Line License Request Form](#) --**Gear Control Package 2**

Gear control Bosch Motorsport functionality

Specific project SW for MS 6.4P EVO, based on MS 6.4 EVO SW, offered as engineering service

SW Package MS 6 Drag 1

- Launch Timer
- Launch Distance
- Torque Pre-Control
- Launch RPM Control
- Universal Outputs for Time/Distance Controls

SW Package MS 6 Drag 2 (requires Drag 1 License)

- Acceleration Sensor MM5.10 included
- Time/Distance Boost Control
- Driveshaft Speed Control
- Driveshaft Gradient Control
- Acceleration Control
- Wheelie Control

Innovation License Device

Activation of a set of additional functions for a single device:

- Crank rotation direction detection (using sensor DG23i)
- Using a 2nd crank backup sensor
- Crank-Pre-set, quick start based on previous crank stop position
- Far-Bank, 2nd injector per cylinder possible
- Cam-only-synchronisation, engine run without crank sensor signal (specific cam trigger wheel needed)

Innovation Package Project

Innovation Package Project has the same content as Innovation License Device, but license is valid for the whole project instead of a single device

DATA_USB

Data copy to USB flash drive

Ordering Information**Engine Control Unit MS 6.4P EVO**Order number **F02U.V03.112-01****Engine Control Unit MS 6 EVO RX**

FIA-homologated version for WRX Championship

Order number **on request****Rugged USB flash drive**Order number **F02U.V03.534-01****Connector for USB flash drive on car loom side**Order number **F02U.002.996-01****Adapter cable to PC USB-Port**Order number **F02U.V01.343-01****Software Options****CCA Hardware Upgrade per device**Order number **F02U.V02.137-01****FULL_LOG_1**Order number **F02U.V02.304-01****PERF_LOG_1**Order number **F02U.V03.054-01**

FULL_LOG_2

Order number **F02U.V02.305-01**

Gear Control Package 1

Order number **please contact MEGA-Line**

Gear Control Package 2

Order number **F02U.V02.108-01**

Specific project SW for MS 6.4 Performance, based on MS 6.4 SW, offered as engineering service

Order number **on request**

SW Package MS 6 Drag 1

Order number **F02U.V0U.409-01**

SW Package MS 6 Drag 2

Order number **F02U.V0U.410-01**

Innovation License Device

Order number **F02U.V02.510-01**

Innovation Package Project

Order number **F02U.V02.511-01**

DATA_USB

Order number **F02U.V03.476-01**

Accessories

Breakout Box BOB MS 6 EVO

Order number **F02U.V02.294-02**


Mating Connector 91 pins



Order number **F02U.B00.711-01**

Mating Connector 105 pins

Order number **F02U.B00.712-01**

Dimensions

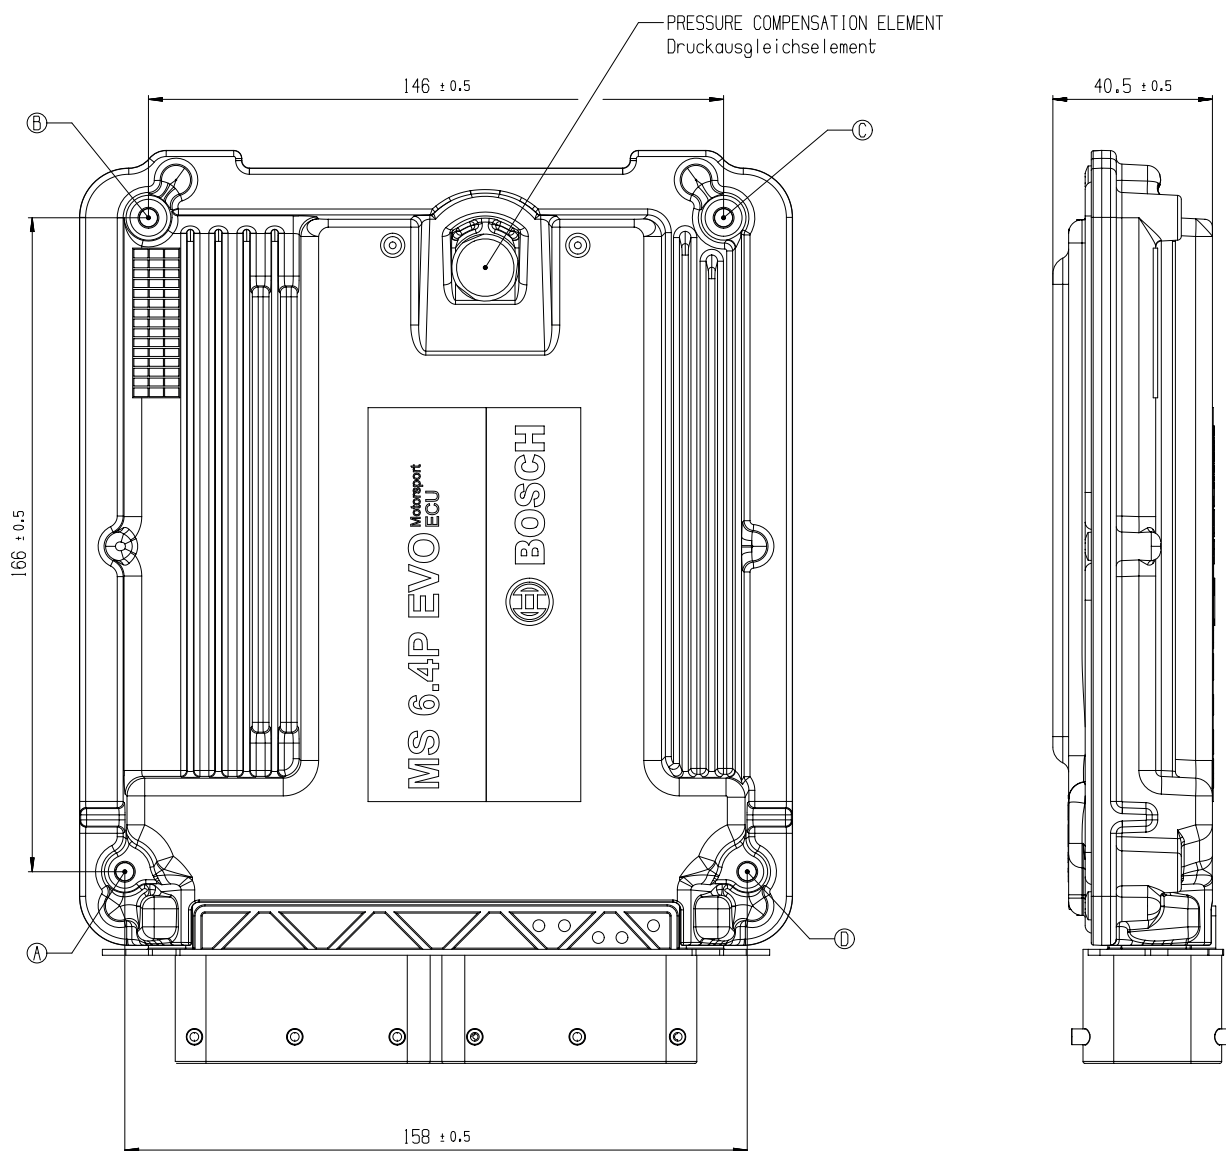

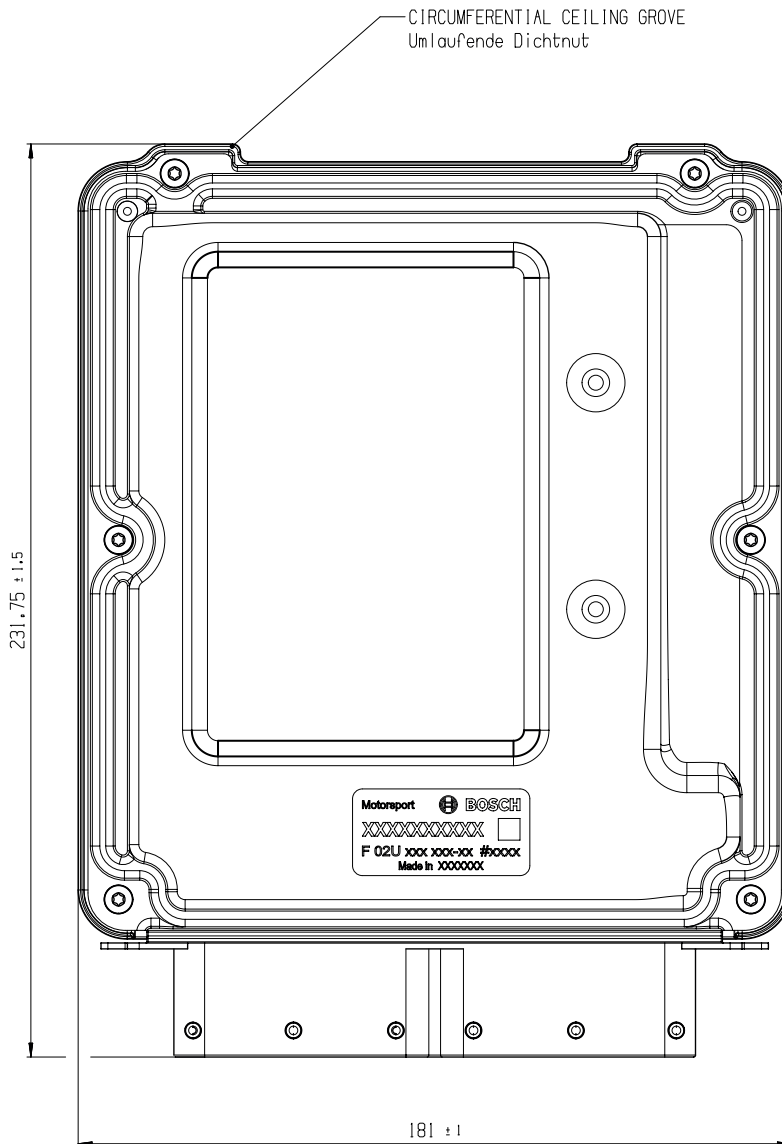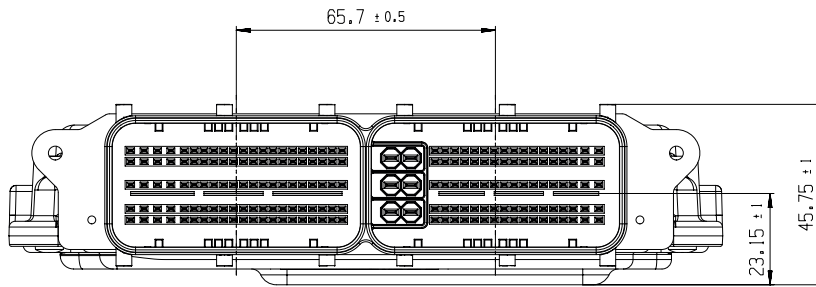

Represented by:

Europe:
Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
Tel.: +49 7062 911 9101
Fax: +49 7062 911 79104
motorsport@bosch.com
www.bosch-motorsport.de

North America:
Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
Tel.: +1 248 876 2977
Fax: +1 248 876 7373
motorsport@bosch.com
www.bosch-motorsport.com

Asia-Pacific:
Bosch Engineering Japan K.K.
Motorsports Department
1-9-32 Nakagawachuo, Tsuzuki-ku
Yokohama-shi
Kanagawa, 224-8601
Japan
Tel.: +81 45 605 3032
Fax: +81 45 605 3059
www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
Robert Bosch Pty. Ltd
Motorsport
1555 Centre Road
Clayton, Victoria, 3168
Australia
Tel.: +61 (3) 9541 3901
motor.sport@au.bosch.com